Raster Data Model

- Why use a raster data model?
- · Raster data representations
 - Cell value
 - Measurement, average, majority, significance
 - Cell-based vs. point-based
- Raster data components
 - Cells, Pixels, Grid
 - Cell size, spatial resolution
 - Bands
 - Spatial reference
- · Examples of raster data
 - Remotely sensed imagery (BV, DN)
 - DEM (elevation)
 - DRG (color)

Raster Data Structure

- Header
 - · Dimension and spatial resolution
 - · Projection and coordinates
 - Thumbnails
- Data
 - Types: ascii, binary (1-bit), integer (8-bit), floating-point (4byte)
 - Single- and multi-band structures (BSQ, BIL, BIP)
 - · Quad tree
 - Data compression (lossless, lossy compression)
- Trailer
 - · Color look-up table
 - Statistics

Raster Data Structure (cont.)

- Uncompressed/ lossless compression
 - Cell-by-cell encoding
 - Run-length encoding (RLE)
 - Quad Tree
- Lossy compression
 - JPEG
 - MrSID (Multi-resolution Seamless Image Database)

LAN and GIS Files - Image Data

LAN and GIS image files are stored in the same format. Each file contains a header record, followed by the image data. The image data are arranged in a Band Interleaved by Line (BIL) format. Each file is virtually unlimited in size - the file structure allows up to 274 billion bytes. The only size constraint is the capacity of the particular storage medium. The file consists of 512-byte records. The first 128 bytes of the first record contains the header information which consists of the following:

Name	Byte(s)	Description		
HDWORD	1:6	A 6 byte array containing 'HEAD74'. (Pre-7.4 files say 'HEADER'.)		
IPACK	7:8	An integer value which indicates the pack type of the data:		
		0 = 8 bit		
		1 = 4 bit		
		2 = 16 bit		
NBANDS	9:10	An integer that indicates number of bands/channels per line. (Always 1 for GIS.)		
	11:16	Unused.		
ICOLS	17:20	An integer*4 number specifying the width of the file in pixels.		
IROWS	21:24	An integer*4 number specifying the length of the file in lines of pixels.		
XSTART	25:28	An integer*4 number specifying the database x-coordinate of the first pixel (upper left) in the file.		
YSTART	29:32	An integer*4 number specifying the database y-coordinate of the first pixel (upper left) in the file.		
	33:88	Unused.		
MAPTYP	89:90	An integer which indicates the type of map projection associated with the file. See PRO files for a complete list.		
NCLASS	91:92	An integer which indicates the number of classes in the data set.		
	93:106	Unused.		
IAUTYP	107:108	An integer which indicates the unit of area associated with each pixel:		
		0 = NONE		


Raster Header Information

Raster Coordinates

- Example
- Columns, Rows = 318, 463
- Cellsize X, Y = 30, 30
- LL Map Coor. = 499995, 5177175
- Map Coor at Column, Row (= m, n)
 X = 499995 + m x 30
 Y = 5177175 (463 n) x 30


Column, X

Cell-by-Cell **RLE** Row 1: 0 0 0 0 1 1 0 0 Row 1:56 Row 2: 0 0 0 1 1 1 0 0 Row 2: 46 Row 3: 0 0 1 1 1 1 1 0 Row 3: 37 Row 4: 0 0 1 1 1 1 1 0 Row 4: 37 Row 5: 0 0 1 1 1 1 1 0 Row 5: 37 Row 6: 0 1 1 1 1 1 1 0 Row 6: 27 Row 7: 0 1 1 1 1 1 1 0 Row 7: 27 Row 8: 0 0 0 0 0 0 0 0

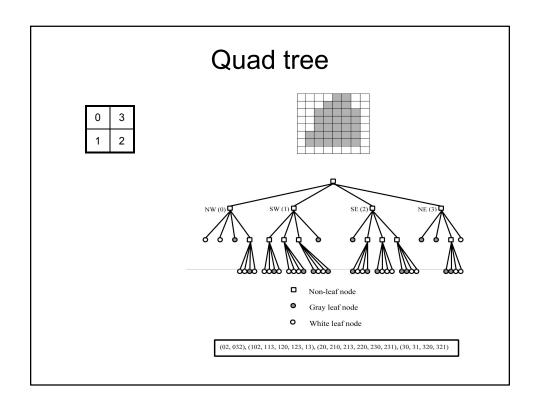

Geometric Transformation

- Affine transformation (rotation, translation, scaling)
- Resampling
 - Nearest neighbor (the nearest cell)
 - Bilinear interpolation (4 nearest cells)
 - Cubic convolution (16 nearest cells)




Testing Interpolator Quality






Helmut Dersch (der@fh-furtwangen.de) Technical University Furtwangen Revised June 30, 1999

http://www.all-in-one.ee/~dersch/interpolator/interpolator.html

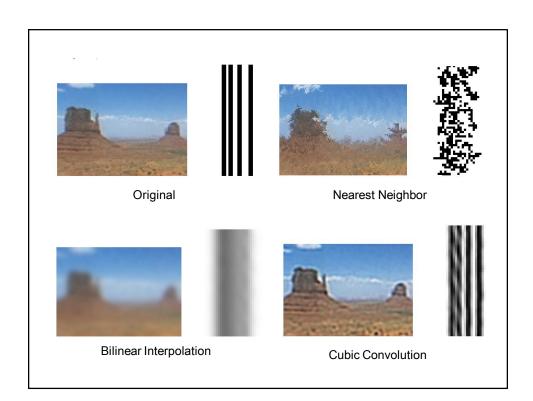

Raster Data in ArcGIS

- GRID
- .img, .lan, .gis
- .tiff (.tif)
- MrSID
- Geodatabase
 - Raster Band
 - Raster Dataset
 - Raster Catalog
 - Managed/unmanaged

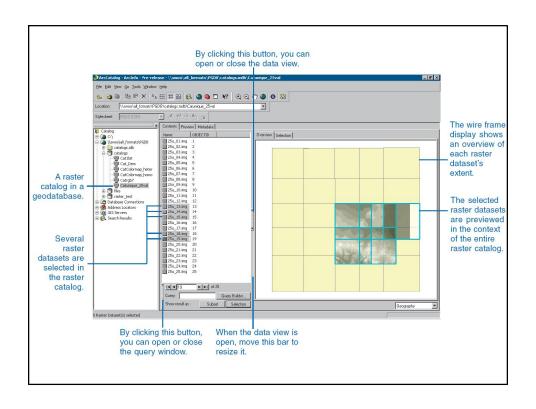

Header Information

- TIFF(Tag(ged) Image File Format) –
 GeoTIFF, .tfw (TIFF World File)
- MrSID (Multi-resolution Seamless Image Database) - .sdw (MrSID World File)

NetCDF (Network Common Data Form)

http://www.unidata.ucar.edu/software/netcdf/index.html


- NetCDF (network Common Data Form) is a set of software libraries and machine-independent data formats that support the creation, access, and sharing of arrayoriented scientific data.
- ArcGIS can create a multidimensional layer from NetCDF. The dimension could be time, altitude, depth, etc. At any given time, only one slice of multidimensional data is visible.
- Main ArcGIS application: animation

What is a layer file (.lyr) in ArcGIS?

 Layer files reference geographic data stored on disk. You can think of them as a cartographic view of your geographic data. They are separate files on disk and have a .lyr extension.


Triangulated Irregular Network (TIN)

- Point (x, y, z)
- Edge
- Triangles
- Topology
 - -The triangle number
 - -The numbers of each adjacent triangle
 - -The three nodes defining the triangle
 - -The x, y coordinates of each node
 - -The surface z value of each node
 - The edge type of each triangle edge (hard or soft)



Generating TIN

- · Selection of significant points from DEM
 - Very Important Points (VIP)
 - Maximum z-tolerance
- · Delaunay triangulation
 - Breaklines (soft, hard)










Terrain Analysis

- Contouring
- Slope
- Aspect
- Curvature
 - Convex vs. concave
 - Profile curvature
 - Planiform curvature
 - Surface curvature = profile planiform



ArcGIS 9.3 Terrain Dataset

Terrain Dataset


- LiDAR/SONAR: mass points
- Contours/ridgelines/streamlines: breaklines
- GPS 3D elevation points
- Lake surfaces: polygons






Terrain Dataset Concepts

Terrains use a TIN data structure to represent surfaces




 Terrains use pyramids (multi-resolution TIN) to represent multiple levels of resolution




Types of feature class data sources in terrains

- Mass points
- Breaklines
- Clipping polygons
- Erase polygons
- Replace polygons
- Hard and soft qualifiers

	Ma	ss Points	
Surface feature type	Feature class	Z value source in the feature class	
Mass points (x,y,z locations)	Point feature class	 Shape geometry, x,y,z per point Attribute column holding a z-value for each point 	
	Multipoint feature class	 Shape geometry, x,y,z per point Attribute column holding one z-value per shape 	
	Line feature class	Shape geometry, x,y,z per vertex Attribute column holding one z-value per shape (such as a contour)	
	Polygon feature class	Shape geometry, x,y,z per vertex Attribute column holding one z-value per shape (such as a shoreline)	

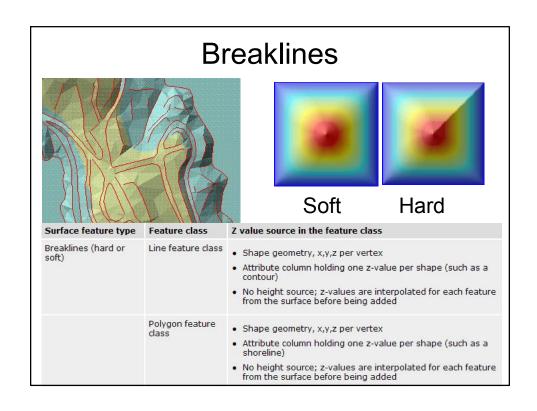

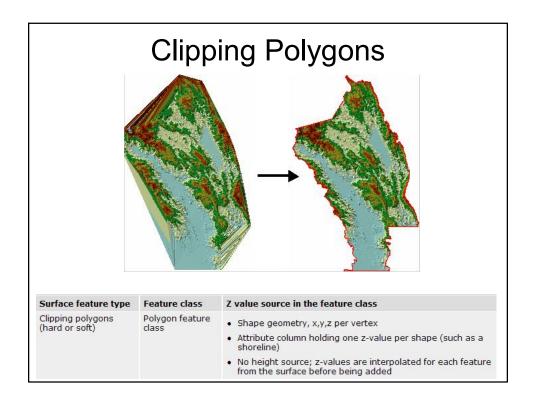

Erase Polygons

 Define holes in a terrain. These are used to represent areas for which you have no data or want no interpolation to occur. They will display as voids, and analysis will consider them to be areas of NoData.



Surface feature type	Feature class	Z value source in the feature class
Erase polygons (hard or soft)	Polygon feature class	Shape geometry, x,y,z per vertex Attribute column holding one z-value per shape (such as a shoreline) No height source; z-values are interpolated for each feature from the surface before being added


Replace Polygons




Surface feature type	Feature class	Z value source in the feature class
Replace polygons (hard or soft)	Polygon feature class	Shape geometry, x,y,z per vertex Attribute column holding one z-value for all vertices in each shape (such as a lake)

Summary

Thematic type	Feature geometry type	SFType
spot heights survey points gps points	point	masspoint
mass points LIDAR points SONAR points	multipoint	masspoint
edge of pavement canals other linear features	polyline	hardline
contours	polyline	masspoint softline
water bodies	polygon polyline	hardline hardreplace
obscured areas	polygon	softerase
study area boundary	polygon	softclip

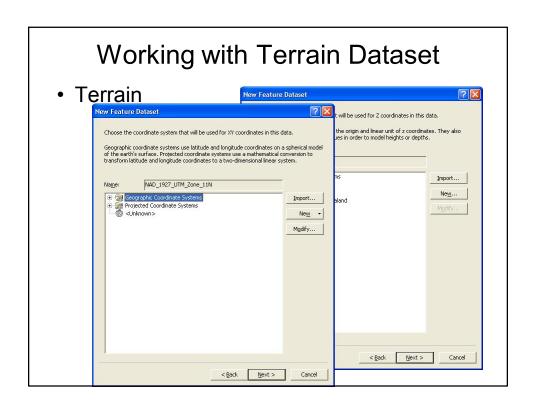

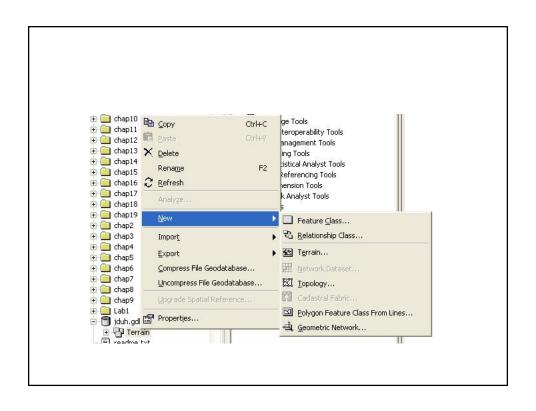

Special considerations: Rasters, all return LIDAR, TINs, and contours

Rasters

 Terrains should be made from vector-based source measurements rather than rasters. Without the inclusion of ancillary data to make improvements, the conversion of a raster to a terrain could not produce a better surface.

All return LIDAR

 Terrain pyramids are most effective with bare-earth LIDAR. The z-tolerancebased filtering employed by the pyramiding process does not work as well when tree canopy is included.

TINs

 A terrain should be made from the original features used to build a TIN rather than the TIN itself.

Contours

 Contours, as with rasters, are not the best source of data from which to build a terrain. They should be included in the terrain using an SFType of masspoint. Softline is also a possibility but less efficient.