


Photogrammetry: DTM Extraction & Editing



Digital Photogrammetry:



Softcopy Photogrammetric Systems

- Scanned stereopair photos
- Interior and exterior orientations (Aerial Triangulation)
 - Camera & photo parameters
 - Flight parameters
 - GCPs
 - Tie points (image matching algorithms)
- Generate DEM and orthophotos

What DPI should I use?


Dots per inch (DPI)

e.g., 200 DPI = 200 dots/inch
 = 200 dots/2.54 cm
 = 2.54/200 cm/dot
 = 0.0127 cm/dot
 = 127 microns/dot

e.g., scan a 1:4000 photo at 200 DPI
 127 microns/dot (map) = 127 x 4000 microns/dot (ground)
 = 508000 microns/dot
 = 50.8 cm/dot = 0.5 meters/dot


Coordinate Systems in Digital Photogrammetry

- Pixel coordinates (rc)
- Image coordinates (xy)
- Image space coordinates (xyz)
- Ground space coordinates (XYZ)

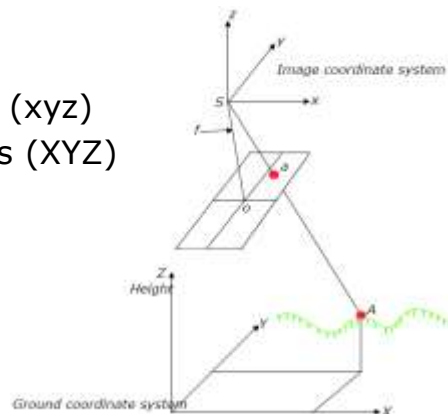

Interior Orientation

- Interior orientation defines the internal geometry of a camera or sensor as it existed at the time of data capture.
- It defines image space coordinates based on pixel and image coordinates and camera parameters (e.g., f and lens distortion model).
 - Principal point & fiducial marks
 - Focal length & lens distortion
 - No GCPs

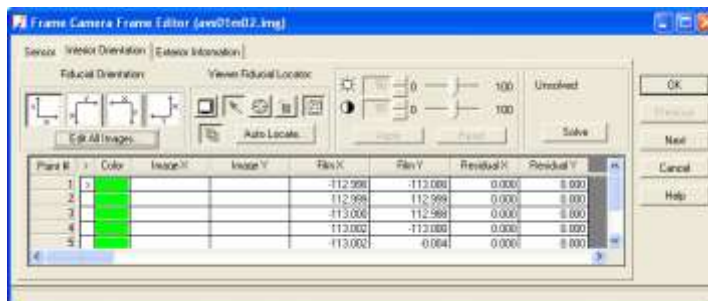


Exterior Orientation

- Exterior orientation defines the position and angular orientation associated with the camera to achieve collinearity condition.
- It defines ground space coordinates based on image space coordinates and flight information (e.g., flying altitude and attitude).

Collinearity Condition & Equations

- If collinearity condition is achieved on both photos in a stereopair then the ground X, Y, Z can be computed from x and y within the image coordinate system on both photos.
- Six exterior orientation parameters
 - Angular orientation: (ω, ϕ, κ)
 - Perspective origin: (X_o, Y_o, Z_o)
- Collinearity equations can be derived using GCPs.
- Inertial Measurement Unit (IMU)

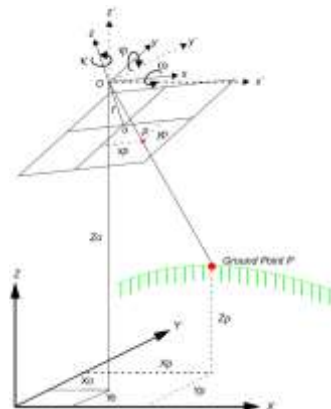

Collinearity Condition & Equations

$$x = -f \frac{a_1(X_A - X_S) + b_1(Y_A - Y_S) + c_1(Z_A - Z_S)}{a_3(X_A - X_S) + b_3(Y_A - Y_S) + c_3(Z_A - Z_S)}$$

$$y = -f \frac{a_2(X_A - X_S) + b_2(Y_A - Y_S) + c_2(Z_A - Z_S)}{a_3(X_A - X_S) + b_3(Y_A - Y_S) + c_3(Z_A - Z_S)}$$

x, y : coordinates of a point on image space

X_A, Y_A, Z_A : ground space coordinates of the point

X_S, Y_S, Z_S : coordinates of the perspective center (lens)

f : focal length

$$\begin{aligned} a_1 &= \cos \phi \cos \kappa + \sin \phi \sin \omega \sin \kappa \\ b_1 &= \cos \phi \sin \kappa + \sin \phi \sin \omega \cos \kappa \\ c_1 &= \sin \phi \cos \omega \\ a_2 &= -\cos \omega \sin \kappa \\ b_2 &= \cos \omega \cos \kappa \\ c_2 &= \sin \omega \\ a_3 &= \sin \phi \cos \kappa + \cos \phi \sin \omega \sin \kappa \\ b_3 &= \sin \phi \sin \kappa - \cos \phi \sin \omega \cos \kappa \\ c_3 &= \cos \phi \cos \omega \end{aligned}$$


Redundancy (DF) of Forming Collinearity Eqs.

Degree of Freedom (DF) =

Observation Eqs - # Unknown

- 1 GCP provides 2 obser. eqs. on one image
- 1 tie point provides 2 obser. eqs. on one image
- 1 photo has 6 unknown ($X, Y, Z, \omega, \rho, \kappa$)
- 1 tie point has 3 unknown (X, Y, Z)


Bundle Block Triangulation

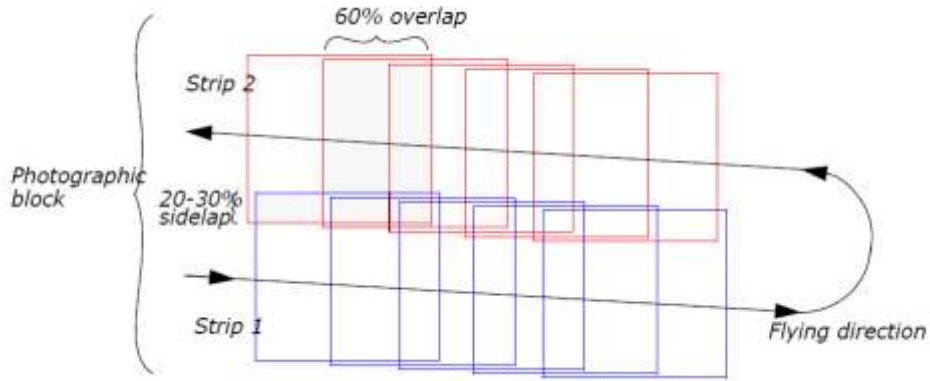

GCPs: How many do you need?

- 3 for single frame.
- 2 on every third image of a strip
- 1 on every third image of a block

Figure 8-12: GCP Configuration



LPS Block Files (.blk)

- A block must be created to performing any photogrammetric tasks in LPS
- A block contains information including:
 - Projection, spheroid, and datum information
 - Imagery used within a project
 - Camera or sensor model information associated with the imagery
 - GCPs and their measured image positions
 - geometric relationships between the imagery in a project and the ground

Photogrammetry vs. Conventional Geometric Correction

Block Triangulation Photogrammetry	Single Frame Orthorectification (Reverse) Photogrammetry	Geometric Correction
Bundle block adjustment (Relies on image models, GCPs, and block triangulation)	Single frame orthorectification (relies on DEM, GCPs, and image models)	Single photo adjustment (Relies on GCPs and polynomial equations)
A minimum of 3 GCPs to achieve high accuracy. GCPs can be shared by the entire block of photos.	A minimum of 3 GCPs to achieve high accuracy	More GCPs are required to achieve satisfactory accuracy. GCPs are not shared.
Minimizes errors for the entire block of photos. Ideal for photo-mosaicking.	Single photo resection - minimizes GCP errors within a single photo.	Minimizes errors within a single photo.
Allows the correction of relief displacement and the generation of DEM when stereopairs are used.	Requires DEM to generate orthophotos	Unable to do orthorectification

Leica Photogrammetry Suite (LPS)

- Leica Geosystems
- Based on ERDAS Imagine
- LPS (Version 10.1)
 - Project Manager (PM)
 - LPS Automatic Terrain Extraction (ATE)
 - Project Manager & ATE were called OrthoBASE in Version 8.X
 - LPS Terrain Editor (TE)
- Imagine VirtualGIS

ERDAS - LPS

